


“Copperhead”

Polyurea Joint Fill Pump

Tankless & Cordless

By: VeloBond

- ❖ Quick change hoses
- ❖ Precision fabrication
- ❖ Low cost heavy duty pumps
 - 2 mount bolts with easy access
- ❖ Ultra-lightweight handle
- ❖ Storage for nozzles & parts
- ❖ One switch – Run/Off/Charge
- ❖ Flat free/non-marring casters
- ❖ Extended mount for hoses
- ❖ Heavy duty cord management wrap
- ❖ Covered and protected electrical components
- ❖ Cordless: spill proof, powerful, maintenance free AGM battery
- ❖ Run off house power if battery is dead
- ❖ Shelf for small generator (not included)
- ❖ Camlocks for a sealed system

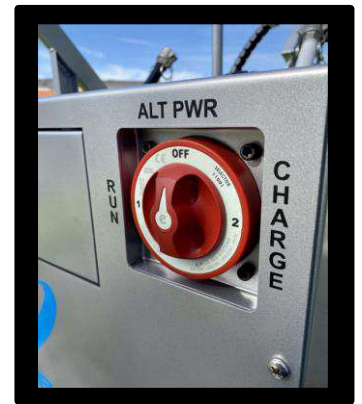

Specifications:

Power: ½ HP DC Motor with 200+ IN LB of torque, Deep Cell AGM Battery, with option for direct power source

Transmission: Heavy duty #40 chain drive

Frame & Dimensions: Powder Coated Steel Tube - 26"W x 35"L x 45"H

Weight (dry): 260 lbs.

Tanks: NONE!

Ratio: 1:1

Pumps: Highly efficient inexpensive aluminum gear pumps, 2 bolt mount with Viton seals available from VeloBond. Pump viscosity to 3,000 cps, optimal is 1,000 cps or less.

Mobility: Non marring 6" never flat casters with optimal swivel brakes, short wheel-base for ease of maneuvering, straight handle across frame with 2 upright individual grip handles.

Handle: Lightweight and ergonomic. Rigid supply tubes from handle manifold to nozzle manifold with on/off and speed control within easy reach for operator comfort. Nozzle manifold fitted with heavy duty zircs for grease insertion and ports for adding back flow valves if desired.

Hoses: Nylon wrapped/braided stainless steel hoses, coupled with control wiring, encased with a heavy-duty protective cord management wrap.

Warranty: VeloBond solely and expressly warrants that its polyurea pump shall be free from defects in materials and workmanship for six (6) months from the date of purchase. Unless authorized in writing by an officer of VeloBond, no other representations or statements made by VeloBond or its representatives, in writing or orally, shall alter this warranty. VeloBond makes no warranties, implied or otherwise, as to the merchantability or fitness for ordinary or particular purposes of its pumps and excludes the same. If the pump fails to conform with this warranty, VeloBond will replace or repair the product at no cost to Buyer. Replacement and/or repair of the pump shall be the sole and exclusive remedy available and buyer shall have no claim for incidental or consequential damages. Any warranty claim must be made within six (6) months from the date of the claim breach. VeloBond does not authorize anyone on its behalf to make any written or oral statements which in any way alter VeloBond's operation information or instructions on its pump literature or on its packaging labels. Any operation or modification of VeloBond's pump which fails to conform with such product information or instructions shall void this warranty. Product demonstrations if any, are done for illustrative purposes only and do not constitute a warranty or warranty alteration of any kind. Buyer shall be solely responsible for determining the suitability of VeloBond's pumps for the Buyer's intended purposes.